



Passage and car-park barriers

square tube 70 x 70 mm
with lateral round tube hoops
total width: approx. 800 mm
above ground: 900 mm



471ZB

Removable, with triangular locking mechanism
acc. to DIN 3223, to ground socket part-no. 470.10,
approx. 500 mm below ground

hot-dip galvanized, with red reflecting stripes

14.5

471F

hot-dip galvanized and white coated with
red reflecting stripes

14.5

471FB

Removable, with Euro profile cylinder lock
three keys, with ground socket part-no. 470.10,
approx. 500 mm below ground

hot-dip galvanized, with red reflecting stripes


16.3

471Z

hot-dip galvanized and white coated with
red reflecting stripes

16.3

471ZB



Assembly instructions

*Always pay attention to adequate drainage for
removable posts (provide gravel fill).
Do not install in standing water.*



470.10

Separate ground socket
for casting in concrete

3.7

470.10

*It is recommended to install a second ground socket (away from blocked terrain).
The post locks itself without key operation, and can not be stolen.*



Passage and car-park barriers

square tube 70 x 70 mm
with lateral round tube hoops
total width: approx. 800 mm
above ground: 900 mm



471UZ

Foldable, with triangular locking mechanism

acc. to DIN 3223, self-engaging lock

To be fixed by plugs

with base plate or for mounting to ground socket part-no. 470.60

hot-dip galvanized, with red reflecting stripes

10.6

471FU

hot-dip galvanized and white coated with red reflecting stripes

10.6

471FUB

Foldable, with Euro profile cylinder lock

three keys, self-engaging lock

To be fixed by plugs

with base plate or for mounting to ground socket part-no. 470.60

hot-dip galvanized, with red reflecting stripes

12.1

471UZ

hot-dip galvanized and white coated with red reflecting stripes

12.1

471UZB



470.60

Ground socket

for casting in concrete
(order together if you want to cast the barrier in concrete)

2.3


470.60

Car-park barriers prevent parking between lots and provide protection from theft and illegal parking.



Car-park barrier

square tube 70 x 70 mm
with lateral round tube hoops
total width: approx. 800 mm
above ground: 500 mm

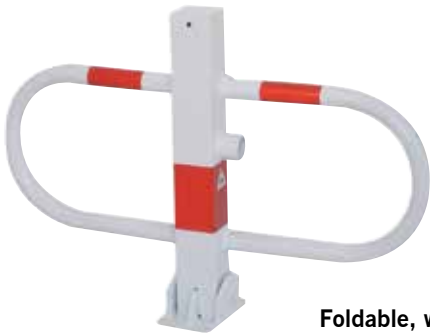

4709FUB

Foldable, with triangular locking mechanism
acc. to DIN 3223, self-engaging lock

To be fixed by plugs

with base plate 100 x 150 mm or for
mounting to ground socket part-no. 470.60

hot-dip galvanized with red reflecting stripes

8.6

4709FU

hot-dip galvanized and white coated with
reflecting stripes

8.6

4709FUB



4709UZB

Foldable, with Euro profile cylinder lock
three keys, self-engaging lock

To be fixed by plugs

with base plate 100 x 150 mm
or for mounting to ground socket part-no. 470.60

hot-dip galvanized with red reflecting stripes

9.1

4709UZ

hot-dip galvanized and white coated with
reflecting stripes

9.1

4709UZB



470.60

Ground socket

for casting in concrete
(order together if you want to cast the barrier in concrete)

2.3

470.60



Flexible!

Crash-proof!



40215UZH

Crash-proof barrier post

flexible to impact and thrust
square tube 70 x 70 mm
above ground: 500 mm
pass-over height: approx. 95 mm

Foldable, with Euro profile cylinder lock

three keys, self-engaging lock

To be fixed by plugs

with base plate Ø 200 mm or for
mounting to ground socket part-no. 470.60


hot-dip galvanized and red coated with white
reflecting stripes

Approx.kg

Part-No.

8.0

40215UZH

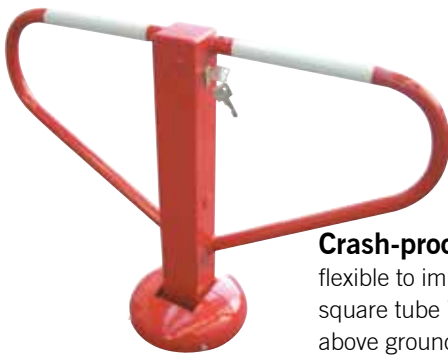

40220UZH

Crash-proof car-park barrier

flexible to impact and thrust
square tube 70 x 70 mm
above ground: 500 mm
pass-over height: approx. 95 mm
with lateral round tube hoops
total width: approx. 800 mm

Foldable, with Euro profile cylinder lock

three keys, self-engaging lock

To be fixed by plugs

with base plate Ø 200 mm or for
mounting to ground socket part-no. 470.60

hot-dip galvanized and red coated with white
reflecting stripes

10.8

40220UZH



470.60

Ground socket

for casting in concrete
(order together if you want to cast the barrier in concrete)

2.3


470.60

Car-park barrier, foldable

square tube 70 x 70 mm
with lateral round tube hoops
total width: approx. 800 mm
above ground: 500 mm
self-engaging lock



Round cylinder



Foldable, with round cylinder
three keys

40770



To be fixed by plugs
with base plate 100 x 150 mm

hot-dip galvanized with red reflecting stripes

hot-dip galvanized and white coated with red reflecting stripes

Approx.kg Part-No.

7.5 40770

7.5 40770B



40771B

For casting in concrete
with welded ground anchor
approx. 300 mm below ground

hot-dip galvanized with red reflecting stripes


hot-dip galvanized and white coated with red reflecting stripes

8.8 40771

8.8 40771B

Car-park barrier, foldable

square tube 70 x 70 mm
with lateral round tube hoops
total width: approx. 800 mm
above ground: 500 mm
self-engaging lock

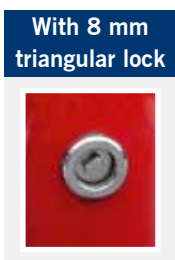

Foldable, with 8 mm triangular lock

40772B

To be fixed by plugs
with base plate 100 x 150 mm

hot-dip galvanized with red reflecting stripes

7.5

40772

hot-dip galvanized and red coated with white reflecting stripes

7.5

40772B

Approx.kg Part-No.



For casting in concrete
with welded ground anchor
approx. 300 mm below ground

40773B

hot-dip galvanized with red reflecting stripes

8.8

40773

hot-dip galvanized and red coated with white reflecting stripes

8.8

40773B



4039

Handy triangular wrench 8 mm
for barrier post, car-park barriers, galvanized

0.1

4039



Car-park barrier, foldable

round tube Ø 60 mm
 with lateral round tube hoops
 and a one-piece base plate
 total width: approx. 800 mm
 total height: approx. 500 mm



40660



Foldable, with Euro profile cylinder lock

three keys, self-engaging lock

hot-dip galvanized with red reflecting stripes
 including fastening material

Approx.kg

Part-No.

8.3

40660





Car park barrier

made of thick-walled round steel tube \varnothing 33.7 x 2.5 mm
 height: approx. 450 mm, width: approx. 850 mm,
 extremely flat when folded down, approx. 45 mm high



472V

Foldable, with padlock
 three keys

hot-dip galvanized with red reflecting stripes
 including fastening material

Approx.kg

Part-No.

5.5

472V



472Z

Foldable, with Euro profile cylinder lock
 three keys, self-engaging lock,
 locking and unlocking outside the dirt zone

hot-dip galvanized with red reflecting stripes,
 including fastening material

5.6

472Z



472A

1 set (3 pieces) anchors for casting in concrete

0.1

472A



472ZP

Foldable, with Euro profile cylinder lock
 three keys and continuous base plate,
 self-engaging lock, locking and unlocking
 outside the dirt zone

hot-dip galvanized with red reflecting stripes
 including fastening material

7.8

472ZP

Holding device for parking signage 2 support posts

steel tube 40 mm x 40 mm x 2.0 mm, galvanized, with screwed parking signage (inclusive)

height above: ground 350 mm

total width: approx. 520 mmm



	Approx.kg	Part-No.
For casting in concrete Total height 500 mm	3.1	4045
To be fixed by plugs Total height 350 mm	4.0	4045P

Round hoops for parking sign

stainless steel Ø 48,3 mm x 2,5 mm

with welded license plate holder

height above ground: 800 mm

total width: approx. 650 mm



	Approx.kg	Part-No.
For casting in concrete	10.9	449.66SE
To be fixed by plugs	9.9	449.66PSE